



BAOJUN Software VDS2 and TABSCAN J2534 Connection Guide


Note: Please install the BAOJUN software before use. Any questions about software setup please feel free to contact us.

1. Create your TABSCAN account with email or phone number, and log in.

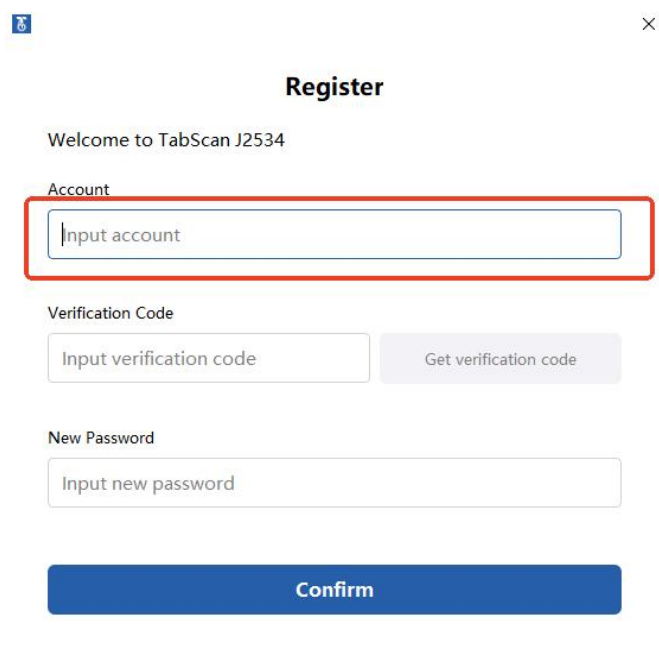


2. Connect the device to your PC using the provided USB cable. Check whether there is an update notice on the top left corner. **For optimal performance, please upgrade to the latest firmware version when available on the TABSCAN platform.**

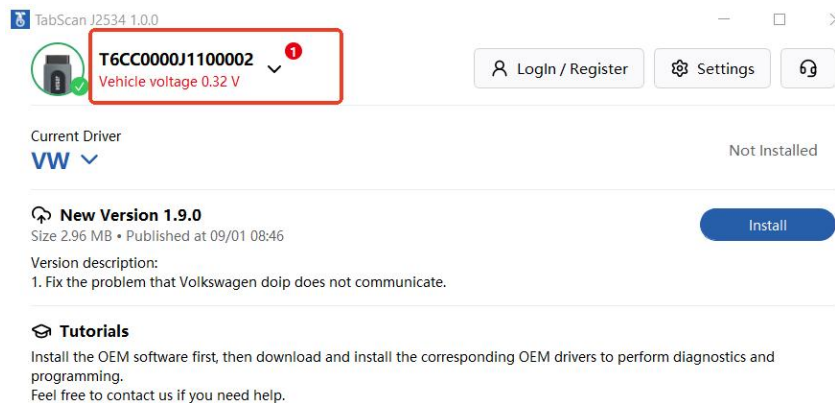


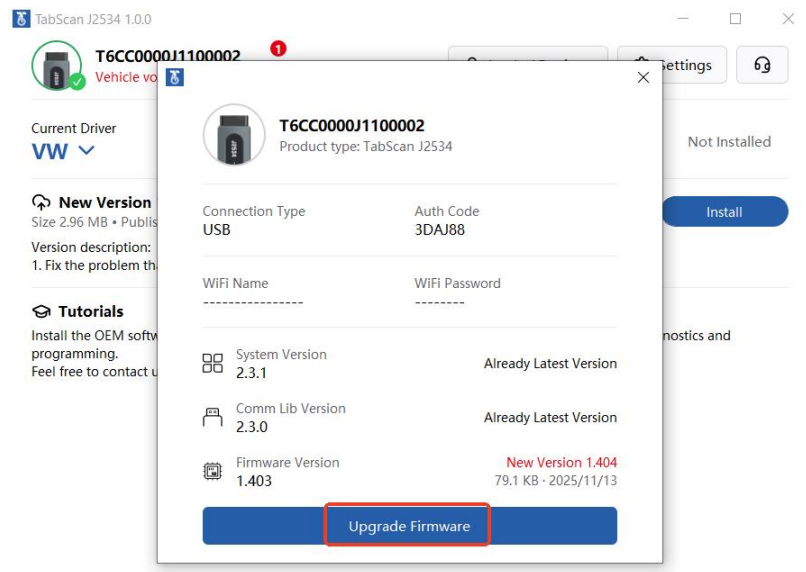

3. Click the current driver's drop-down menu and select the **SAIC** driver to install.
Note: For the stability of the program, it's better to only have one vehicle brand driver installed at a time.

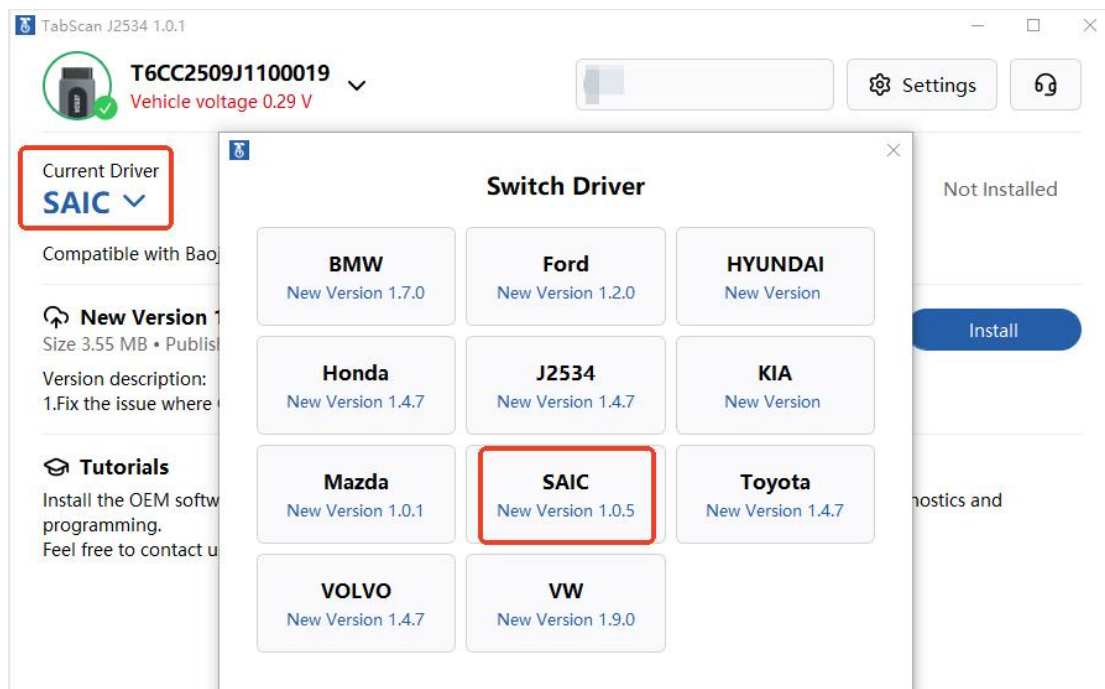


4. Make sure the driver is enabled before using software to diagnose.

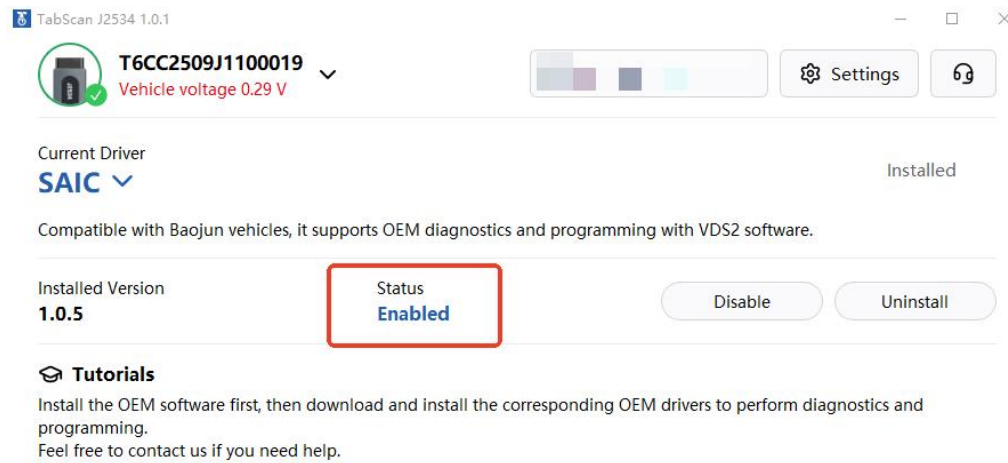


5. Double click the OEM software **VDS2** icon to open.



6. Click “VDI” on the top right corner.

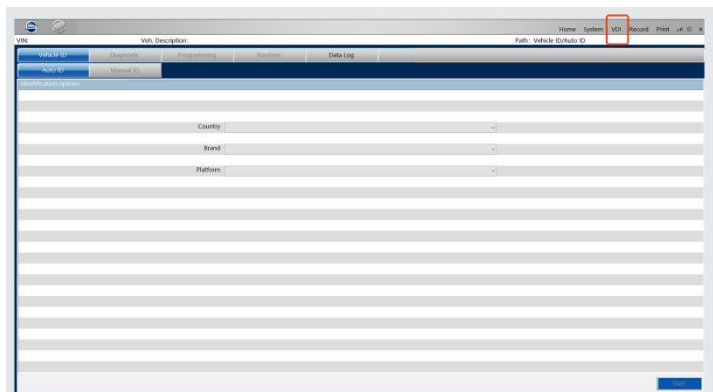

7. Choose the device icon and click **“Connect”**. Once the status shows "Connected", the connection is successful.

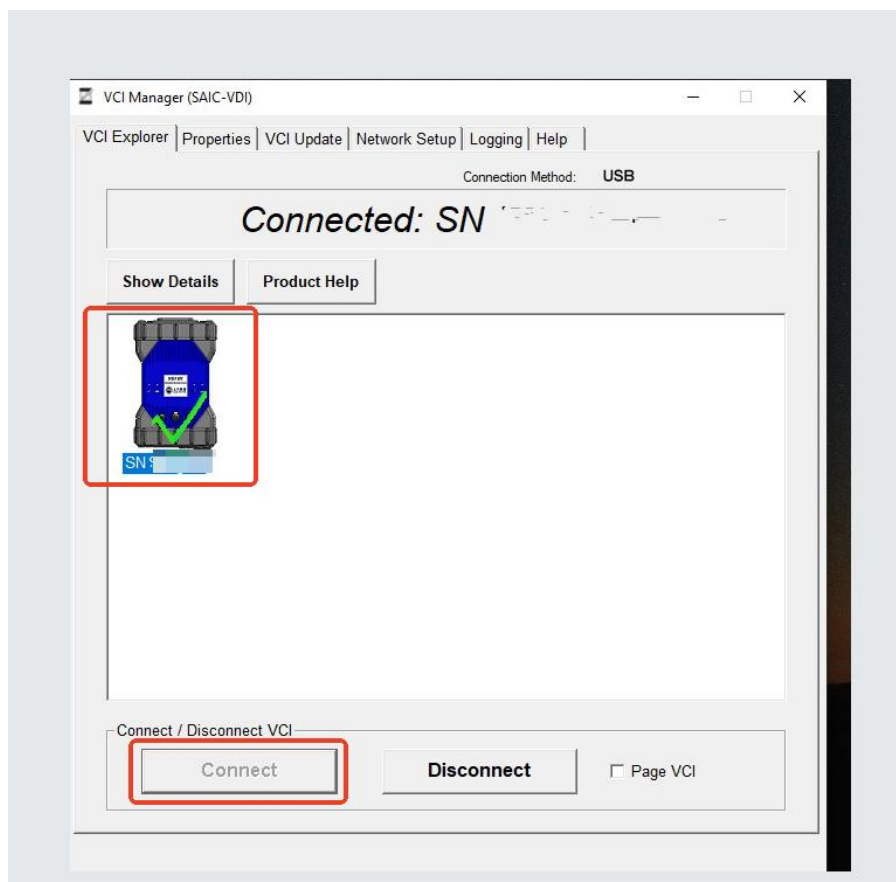

8. Choose vehicle's Country/Brand/Platform, click **“Start”** to start diagnosis.

