


BMW OEM Software ISTA and TABSCAN J2534 Connection Guide


Note: Please install the BMW OEM software before use. Any questions about OEM software setup please feel free to contact us.

1. Create your TABSCAN account with email or phone number, and log in.

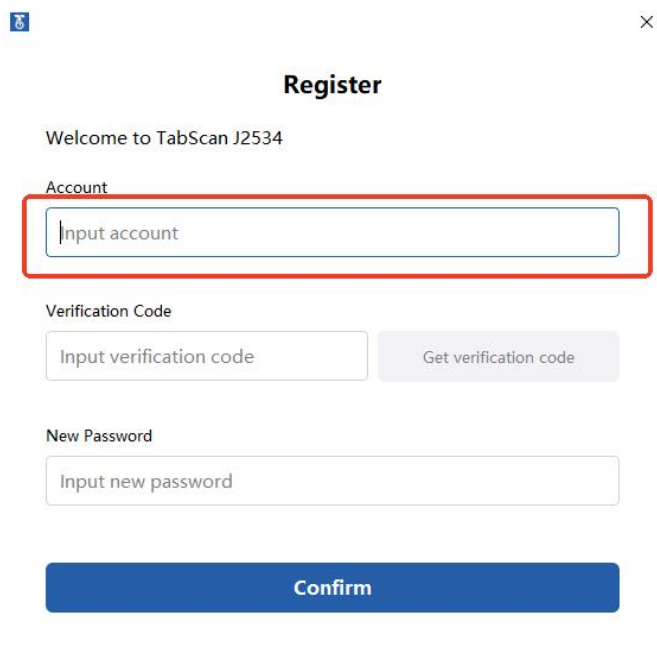


The screenshot shows a web browser window titled "Register" for "TabScan J2534". The page has a close button (X) in the top right corner. The main heading is "Register". Below it, a welcome message says "Welcome to TabScan J2534". The form contains three input fields: "Account" (labeled "Input account"), "Verification Code" (labeled "Input verification code"), and "New Password" (labeled "Input new password"). To the right of the "Verification Code" field is a button labeled "Get verification code". At the bottom of the form is a large blue button labeled "Confirm". The "Account" field is highlighted with a red rectangular box.


2. Connect the device to your PC using the provided USB cable. Check whether there is an update notice on the top left corner. **For optimal performance, please upgrade to the latest firmware version when available on the TABSCAN platform.**

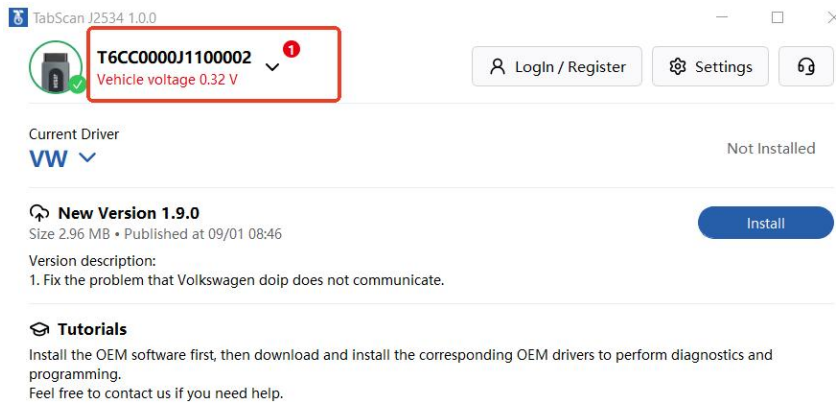


The screenshot shows the TabScan J2534 1.0.0 software interface. At the top left, there is a status bar with a green checkmark icon, the text "T6CC0000J1100002", a red notification bubble with the number "1", and "Vehicle voltage 0.32 V". To the right of this are buttons for "LogIn / Register", "Settings", and a help icon. Below the status bar, the "Current Driver" section shows "VW" with a dropdown arrow and "Not Installed". A "New Version 1.9.0" section is visible, showing "Size 2.96 MB • Published at 09/01 08:46" and a blue "Install" button. Below this is a "Version description" section with the text "1. Fix the problem that Volkswagen doip does not communicate." At the bottom, there is a "Tutorials" section with the text "Install the OEM software first, then download and install the corresponding OEM drivers to perform diagnostics and programming. Feel free to contact us if you need help."

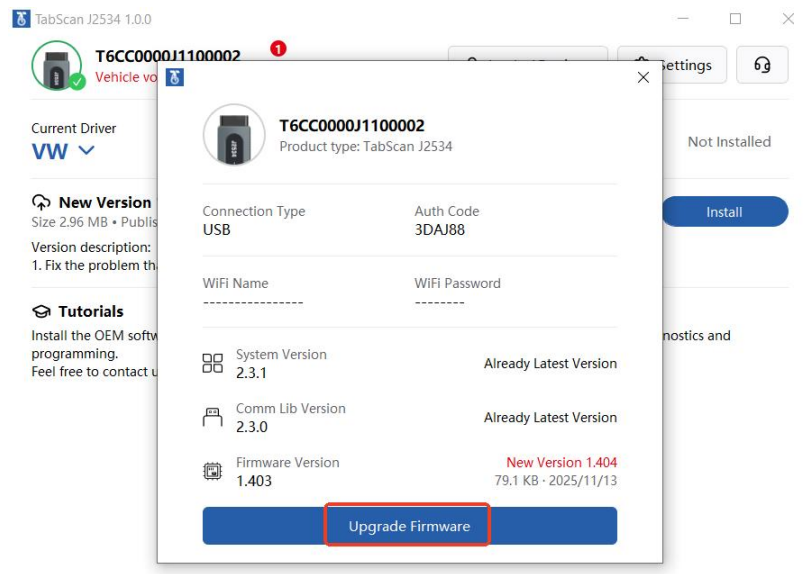


3. Click the drop-down arrow of the current driver, select the **BMW** driver to install.
Note: For the stability of the program, it's better to only have one vehicle brand driver installed at a time.

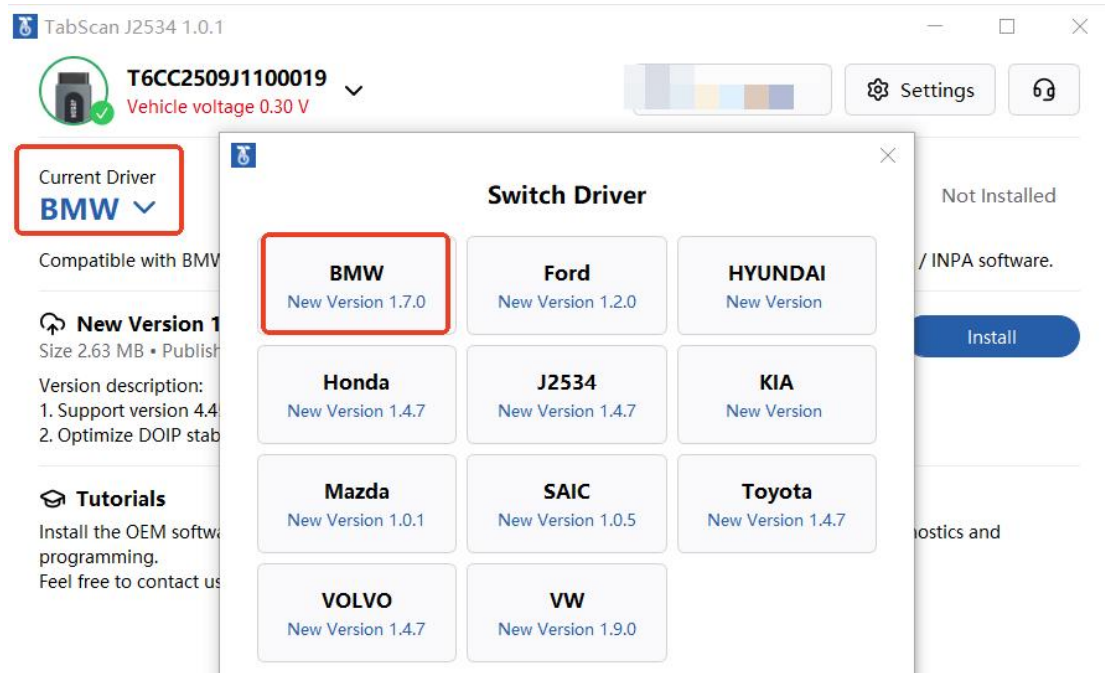


4. Make sure the driver is enabled before using OEM software to diagnose.

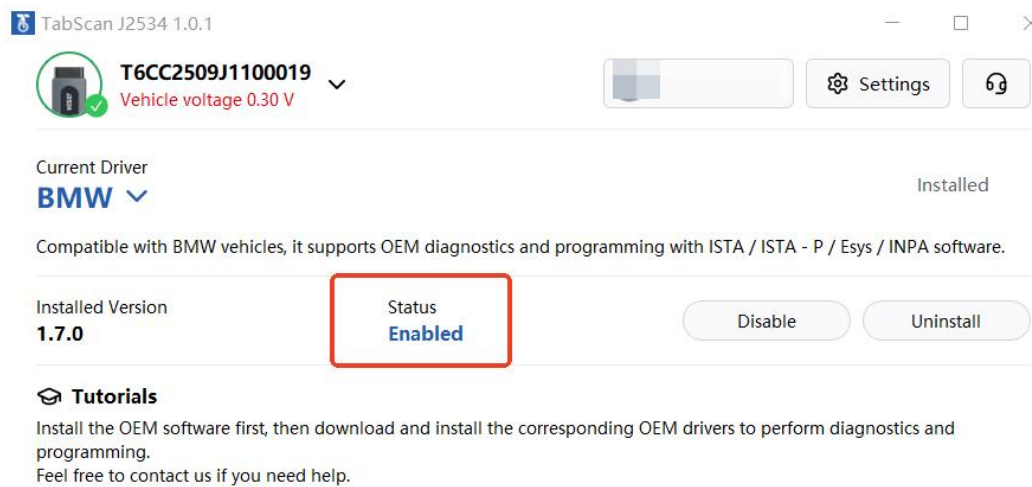


5. Double click the OEM software **ISTA** icon to open.

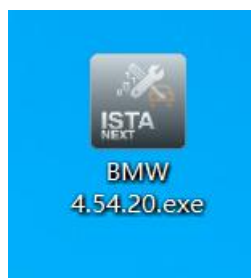

6. Click “**Operations**”, choose “**Read Out Vehicle Data**”, then click “**Complete identification**” to continue.

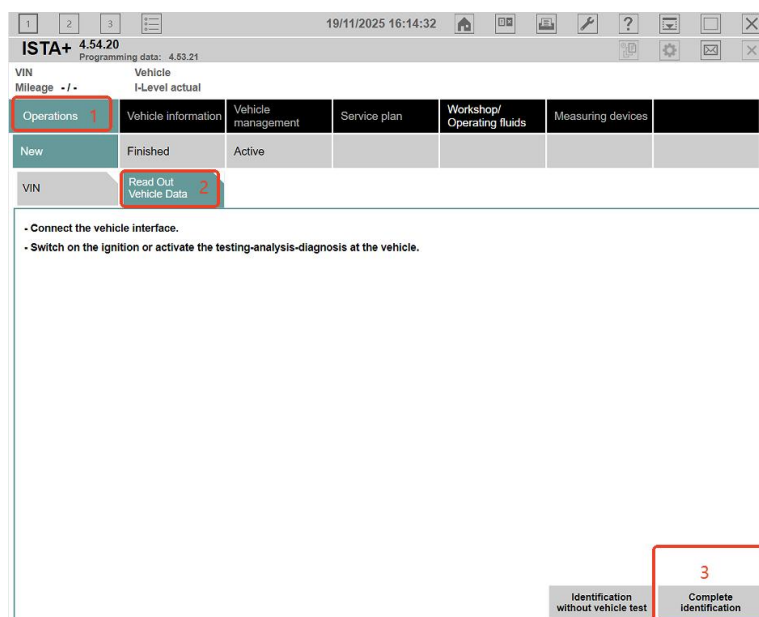

7. A VIN appears on the Connection Manager, which means the connection is successful. Then, select the VIN that appears below and click **"Set up connection"** to continue.

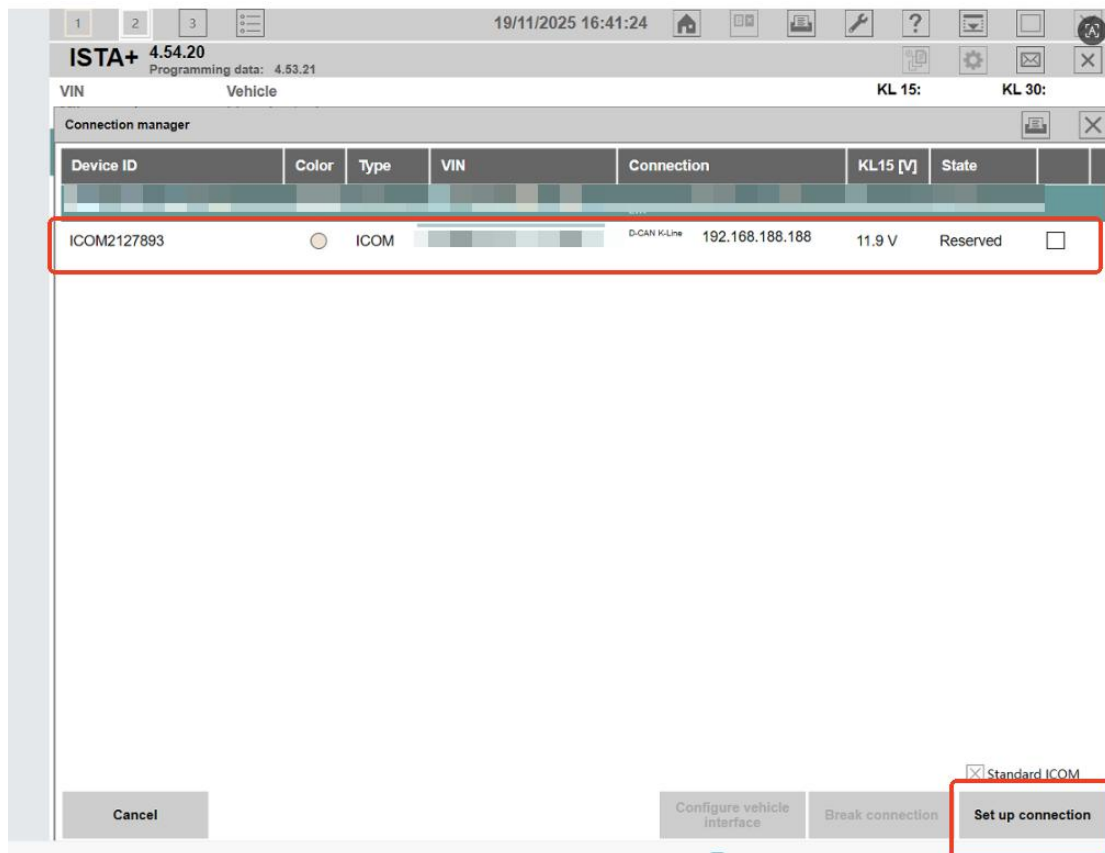

8. Start to diagnose.

