


TOYOTA OEM Software and TABSCAN J2534 Connection Guide


Note: Please install the TOYOTA OEM software before use. Any questions about OEM software setup please feel free to contact us.

1. Create your TABSCAN account with email or phone number, and log in.

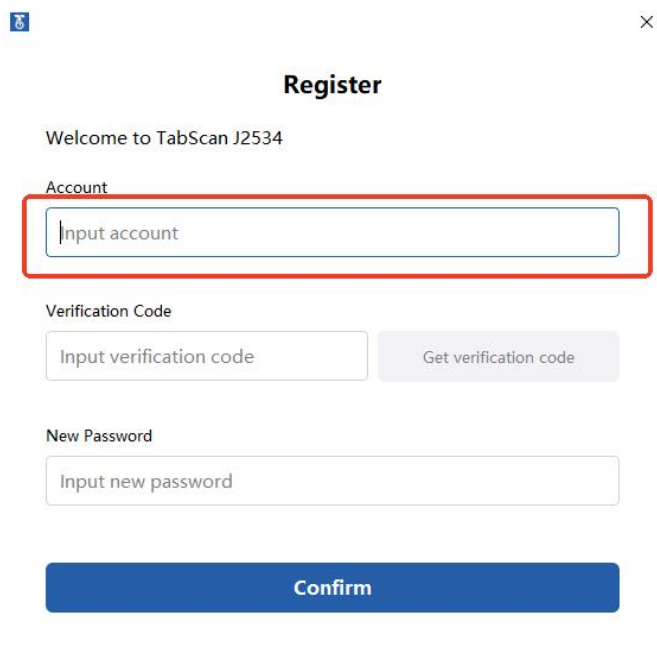


The screenshot shows a web browser window titled "Register" for "TabScan J2534". The form includes a welcome message, an "Account" field (highlighted with a red box), a "Verification Code" field with a "Get verification code" button, a "New Password" field, and a blue "Confirm" button at the bottom.


2. Connect the device to your PC using the provided USB cable. Check whether there is an update notice on the top left corner. **For optimal performance, please upgrade to the latest firmware version when available on the TABSCAN platform.**

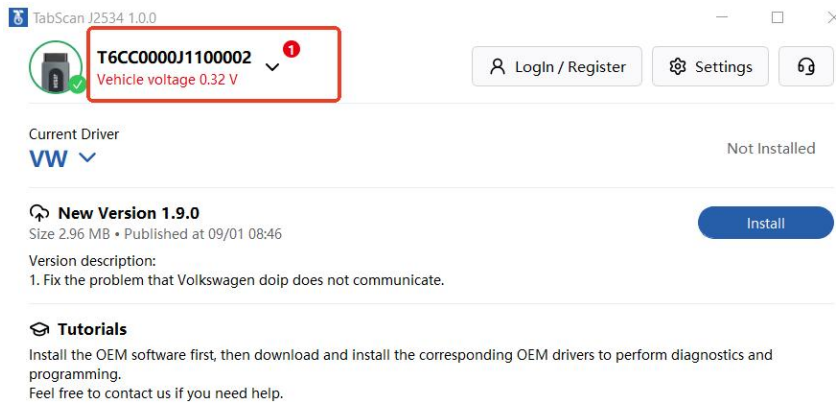


The screenshot shows the TabScan J2534 1.0.0 software interface. A red box highlights the top left corner showing the device ID "T6CC0000J1100002" and "Vehicle voltage 0.32 V". The interface includes a "Current Driver" section with a "VW" logo and a "Not Installed" status. A "New Version 1.9.0" update notice is displayed with an "Install" button. A "Tutorials" section provides instructions on installing OEM software and drivers.

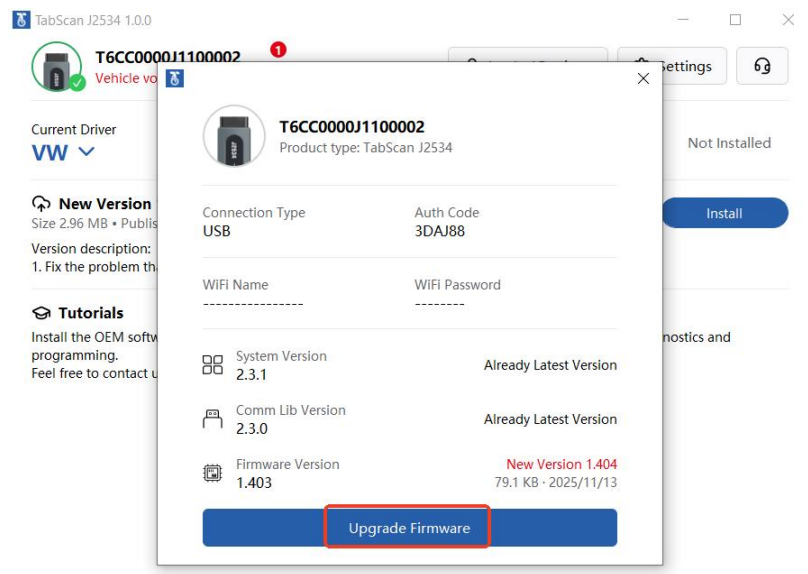

- Click the current driver's drop-down menu and select the **Toyota driver** to install.
Note: For the stability of the program, it's better to only have one vehicle brand driver installed at a time.

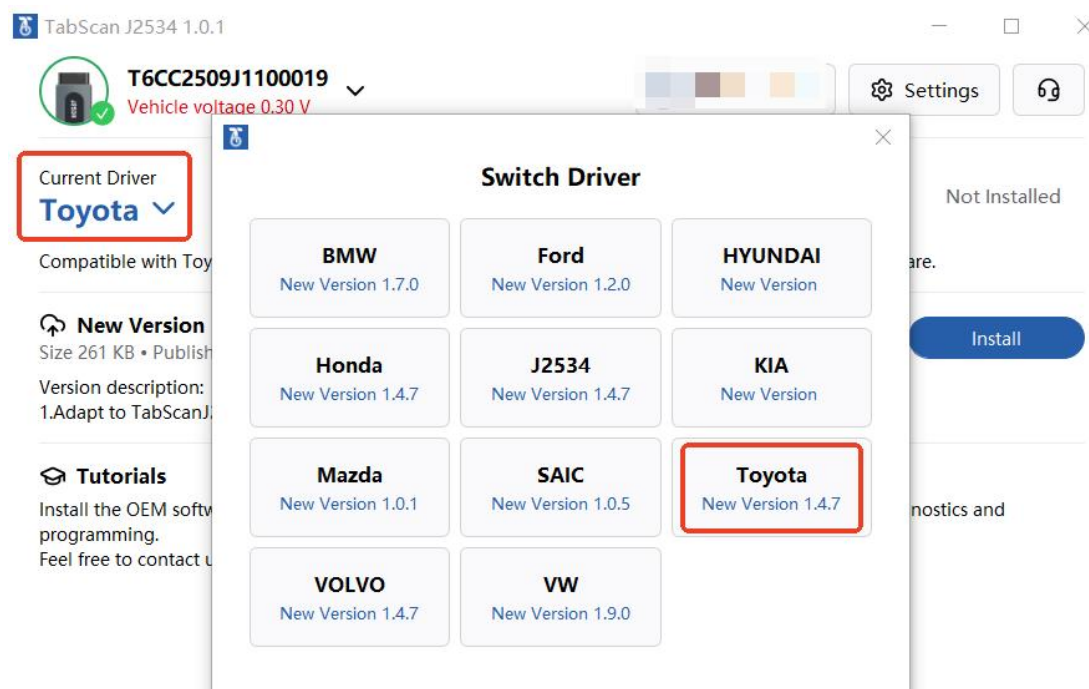

4. Make sure the driver is enabled before using OEM software to diagnose.

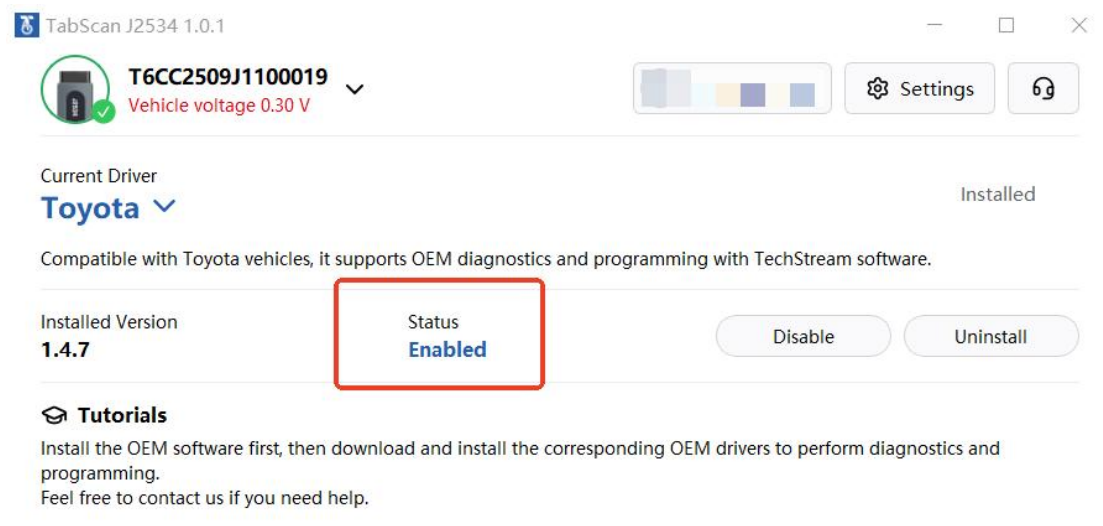


5. Double click the OEM software **Techstream** icon to open.



6. Click “Setup”, choose “VIM Select”.



7. Choose “TabScanj2534” in Interface setup, then click “OK” to continue.

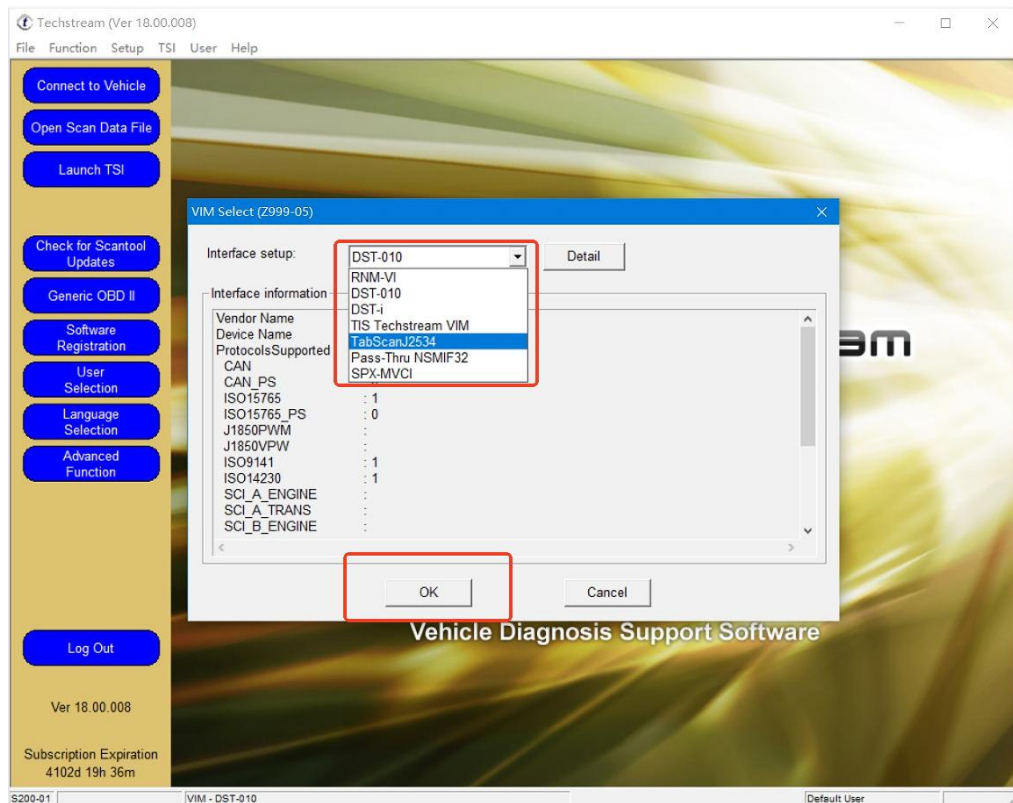

8. Click **“Connect to Vehicle”** to start diagnosis.

